



• Grande passaggio barra
Big through hole

• Foratura posteriore e anteriore - Attacco cilindrico
Mounting from front and rear of chuck - Plain back mounting



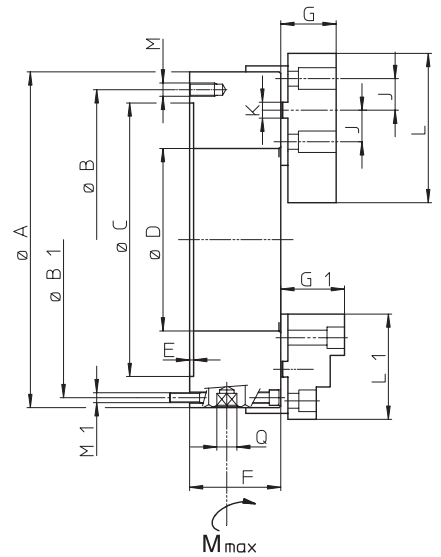

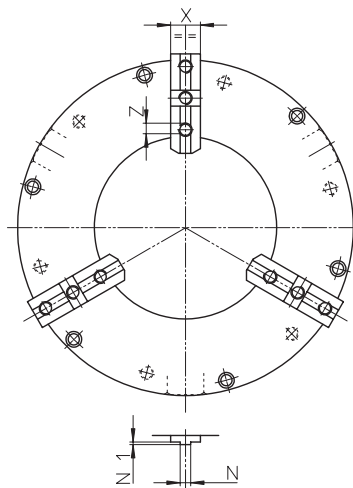




Soggetto a cambiamenti tecnici / Subject to technical changes

SMW tipo SGSBB-3		405	515
Attacco/Mounting	DIM	FL330	FL420
DIN 6350	A	405	515
	B	362	458
DIN 6350	B1	381	481,5
	C(H6)	330	420
	D	220	320
	E	5	5
	F	110	120
	G	67	79
	G1	67	79
	J ±0,1	38,1	38,1
	K +0,01	19,04	19,04
	L	180	200
	L1	127	127
	M	6xM16	6xM16
	M1	6xM12	6xM16
	N -0,015	12,7	12,7
	N1	3,2	3,2
	Q	17	17
	X(h6)	36	40
	Z	M16	M20

Velocità max./Max speed	r.p.m.	800	650
Coppia/Torque M max	N.m	280	360
Massa con griffe/Weight (w. jaws)	Kg	73	119
Momento d'inerzia/Mom. of inertia	Kgm ²	1,5	3,9

CODICE D'ORDINE / ORDERING EXAMPLE		
Foratura posteriore e anteriore Rear/Frontal mounting	33031840	33031850




RICAMBI/SPARE PARTS		
 Set-3 False gr./Master jaws	03574050	03575050
 Set-3 Bloc. teneri/Soft jaws	03604050	03605050
 Set-3 Grif. rev./Rev. jaws	03634050	03635050
 Corona/Scroll	03534050	03535050
 Pignone/Pinion	03544050	03545050
 Chiave norm./Wrench		02714000
 Grasso/Grease		10731131

Dotazione standard:

- 1 Set-3 false griffe
- 1 Set-3 blocchetti teneri-L
- 1 Set-3 griffe reversibili

Standard equipment:

- 1 Set of 3 master jaws
- 1 Set of 3 soft top jaws-L
- 1 Set of 3 reversible jaws

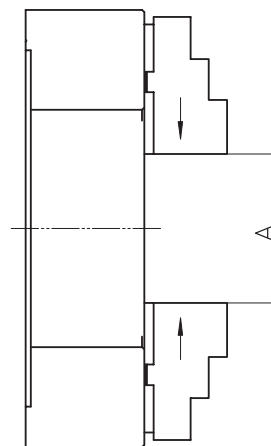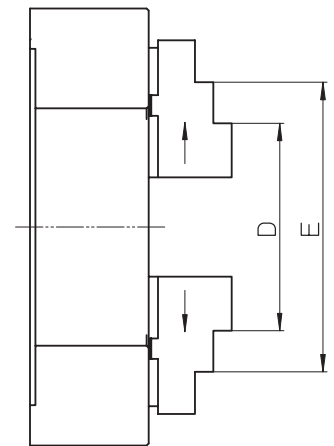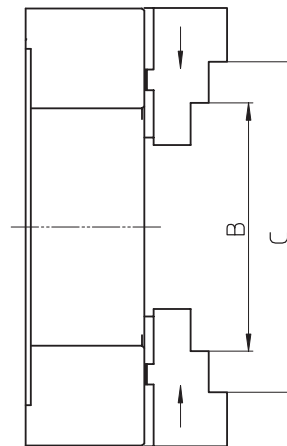

Diametri di bloccaggio SGSBB-3 Clamping diameters SGSBB-3	405	515
Ø A	138-259	264-349
Ø B	230-302	355-440
Ø C	334-406	431-516
Ø D	192-313	366-451
Ø E	291-412	442-527